

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 July 2002 (18.07.2002)


PCT

(10) International Publication Number
WO 02/055779 A2

- (51) International Patent Classification⁷: D04H 1/46, 3/10, 3/16
- (21) International Application Number: PCT/US01/48858
- (22) International Filing Date:
12 December 2001 (12.12.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/257,246 20 December 2000 (20.12.2000) US
10/004,615 1 November 2001 (01.11.2001) US
- (71) Applicant: **KIMBERLY-CLARK WORLDWIDE, INC.** [US/US]; 401 N. Lake Street, Neenah, WI 54956 (US).
- (72) Inventors: **STEINKE, Tara, Tryphena**; 1600 West Broadway #8A, Anaheim, CA 92802 (US). **SHULTZ, Jay, Sheldon**; 550 Woodline Court, Roswell, GA 30076 (US).
- (74) Agents: **TULLEY, JR., Douglas, H. et al.**; **KIMBERLY-CLARK WORLDWIDE, INC.**, 401 N. Lake Street, Neenah, WI 54956 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: HYDRAULICALLY ARRANGED NONWOVEN WEBS AND METHOD OF MAKING SAME

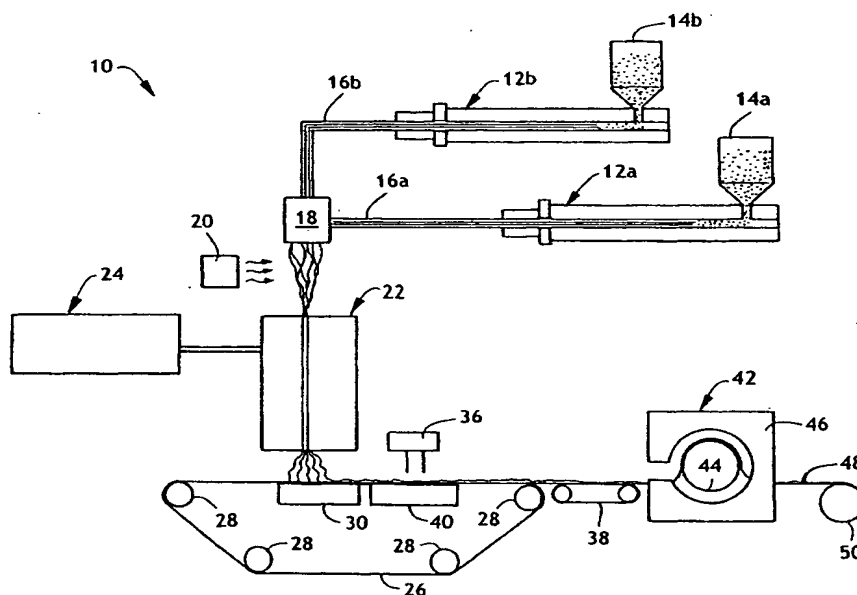

(57) Abstract: A process of forming a nonwoven fabric is disclosed which comprises the steps of forming a precursor web of multicomponent substantially continuous filaments, exposing the precursor web to a hydraulic arrangement treatment to form apertures without causing substantial filament entanglement, and thereafter forming inter-filament bonds and an integrated web. The resulting apertured nonwoven fabrics have good hand and tactile aesthetics and have a great variety of uses including use in absorbent personal care products, garments, medical applications, and cleaning applications.

WO 02/055779 A2



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

HYDRAULICALLY ARRANGED NONWOVEN WEBS **AND METHOD OF MAKING SAME**

TECHNICAL FIELD

The present invention generally relates to hydraulically arranged continuous filament nonwoven fabrics and methods of making the same.

5

BACKGROUND OF THE INVENTION

Nonwoven fabrics are useful for a wide variety of applications, including use as one or more components within personal care products. More specifically, nonwoven fabrics are commonly used within infant care items such as diapers, child care items such as training pants, feminine care items such as sanitary napkins, adult care items such as incontinence products, and personal hygienic care items such as facial and body wipes. Nonwoven fabrics have also found use in garments including protective workwear and medical apparel such as surgical gowns. Other nonwoven medical applications include nonwoven wound dressings and surgical dressings. Cleaning applications utilizing nonwovens include towels and wipes. Still other uses of nonwoven fabrics are well known in the art.

Nonwoven webs of continuous filaments made by melt-spinning thermoplastic polymers are known in the art. Generally described, the process for making spunbond nonwoven fabrics includes extruding a thermoplastic polymeric material through a spinneret and drawing the extruded material into filaments with a stream of high velocity air to form a random web on a collecting surface. Such a method is referred to as meltspinning. Spunbond processes are generally defined in numerous patents including, for example, U.S. Pat. No. 4,340,563 to Appel, et al., and U.S. Pat. No. 3,802,817 to Matsuki, et al.

A particular type of spunbond utilizes multiple polymers in order to make multicomponent or bicomponent nonwoven polymeric fabrics. The term "multicomponent" refers to filaments formed from at least two polymer streams that have been spun together to form one filament, such that the filament has two or more distinct components arranged in distinct zones across the cross-section of the filament which extend along the length of the filament. Multicomponent filaments and methods of making the same are known in the art and, by way of example, are generally described in U.S. Patent No. 5,382,400 to Pike et al.,

U.S. Patent No. 5,989,004 to Cook and U.S. Patent Nos. 3,423,266 and 3,595,731 both to Davies et al.

The characteristics or physical properties of nonwoven webs are controlled, at least in part, by the density or openness of the fabric. Generally speaking, nonwoven webs made from crimped filaments have a lower density, higher loft and improved resiliency compared to similar spunbond filament nonwoven webs of uncrimped filaments.

Such lofty, low density webs exhibit cloth-like textural properties, e.g., softness, drapability and hand. Various methods of crimping melt-spun multicomponent filaments are known in the art. As disclosed in U.S. Pat. Nos. 3,595,731 and 3,423,266 to Davies et al., bicomponent fibers or filaments may be mechanically crimped and the resultant fibers formed into a nonwoven web or, if the appropriate polymers are used, a latent helical crimp produced in bicomponent fibers or filaments may be activated by heat treatment of the formed web. Alternatively, as disclosed in U.S. Patent No. 5,382,400 to Pike et al., the heat treatment may be used to activate the latent helical crimp in the fibers or filaments before the fibers or filaments have been formed into a nonwoven web.

Nonwoven webs or fabrics used in personal care products, garments, medical applications, and cleaning applications may desirably have apertures or perforations through the web. Apertures are a useful means for fluid management or transport generally, and are particularly useful means for fluid intake and transport with respect to high viscosity fluids.

Apertures in nonwoven webs may be imparted by slitting or cutting through portions of the web followed by stretching of the nonwoven web to pull open apertures at the slits. However, aperturing or perforating by slitting through the web necessarily damages the integrity of the individual continuous filaments. Alternatively, as disclosed in U.S. Patent No. 4,588,630 to Shimalla, apertures may be formed by heat and compression fusing of the web at discrete sites, followed by stretching of the nonwoven web to pull open apertures at the fused sites. However, aperturing by heat-fusing then stretching has the undesirable effect of leaving apertures the edges of which are defined by hard and potentially abrasive fused thermoplastic polymer, as well as damaging the integrity of the individual filaments.

Hydroentangling has also been used to impart apertures to a nonwoven web. Hydroentangling is a well known principle involving the use of high pressure, needle-fine water jets to cause substantial filament entanglement such that the individual fibers or filaments are intertwined and entangled about one another to a high degree. This high degree of filament entanglement gives functional integrity to the web structure and forms a highly entangled and consolidated fibrous structure. Basic principles of hydroentangling

are disclosed in U.S. Pat. Nos. 3,485,706 and 3,494,821 both to Evans. Examples of using hydroentangling processes to effect entanglement bonding and aperturing of webs of staple length fibers are disclosed in U.S. Pat. Nos. 3,747,161 and 4,016,317 both to Kalwaites, U.S. Pat. No. 4,379,799 to Holmes et al., and U.S. Pat. No. 4,735,842 to Buyofsky, et al. In order to impart substantial filament entanglement and give the web structure functional integrity, water pressures from as high as 200 pounds per square inch (psi) to 5,000 psi are described as necessary. However, use of high pressure water in these hydroentangling processes tends to densify or compact the nonwoven web, destroying its loft. Additionally, the mechanical requirements for high pressure hydroentangling such as pumping systems able to operate at high pressures, complex nozzles able to produce high-pressure, needle-fine water jets, and extensive water filtration systems to prevent clogging of the fine jet nozzles are cost prohibitive.

There exists a need for an economically produced apertured nonwoven material retaining high overall loft and, in particular, wherein the loft of the material subjected to an aperturing process is not substantially decreased by the aperturing process. There further exists a need for a high loft apertured nonwoven material wherein the edges of the apertures are unfused, thereby providing a soft fabric with good hand and pleasing tactile aesthetics. Still furthermore, there exists a need for a high loft apertured material having soft aperture edges wherein the integrity of the filaments of the web has not been compromised by a destructive aperturing process.

SUMMARY OF THE INVENTION

The aforesaid needs are fulfilled and the problems experienced by those skilled in the art overcome by a nonwoven web made by a process comprising the steps of forming a precursor web of multicomponent substantially continuous filaments, exposing the precursor web to a hydraulic arrangement treatment to form apertures without causing substantial filament entanglement, and thereafter autogenously bonding the web.

In one aspect of the invention, the precursor web comprises a lofty web of crimped multicomponent substantially continuous filaments. In a further aspect of the invention, the precursor web comprises multicomponent substantially continuous filaments which possess latent crimp, which latent crimp is activated after the formation of apertures.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic drawing of a process line suitable for practicing the present invention.

5 FIG. 2A is a drawing illustrating the cross-section of a multicomponent filament with the polymer components in a side-by-side arrangement.

FIG. 2B is a drawing illustrating the cross-section of a multicomponent filament with the polymer components in an eccentric sheath/core arrangement.

10 FIG. 2C is a drawing illustrating the cross-section of a multicomponent filament with the polymer components in side-by-side arrangement, wherein each side has polymer components in a sheath/core arrangement.

FIG. 2D is a drawing illustrating the cross-section of a multicomponent filament with the polymer components in side-by-side arrangement, wherein each side has polymer components in an eccentric sheath/core arrangement.

15 FIG. 3 is a schematic drawing of an exemplary nonwoven fabric of the present invention.

DEFINITIONS

20 As used herein and in the claims, the term "comprising" is inclusive or open-ended and does not exclude additional unrecited elements, compositional components, or method steps.

As used herein the term "nonwoven" fabric or web means a web having a structure of individual filaments or threads which are interlaid, but not in an identifiable manner as in a knitted or woven fabric. Nonwoven fabrics or webs have been formed by many processes
25 including, but not limited to, meltblowing processes, spunbonding processes, hydroentangling, air-laid and bonded-carded web processes.

As used herein the term "substantially continuous" filament means a filament having a length to diameter ratio in excess of about 15,000 to 1, and desirably in excess of 50,000 to 1.

30 As used herein, "substantial filament entanglement" describes the result wherein the individual fibers or filaments have been intertwined and entangled about one another to such a degree as to give functional integrity to the web structure and form a highly entangled consolidated fibrous structure.

As used herein, the term "machine direction" or MD means the direction of the fabric
35 in the direction in which it is produced. The term "cross machine direction" or CD means the direction of the fabric substantially perpendicular to the MD.

As used herein the term "polymer" generally includes but is not limited to, homopolymers, copolymers, such as for example, block, graft, random and alternating copolymers, terpolymers, etc. and blends and modifications thereof. Furthermore, unless otherwise specifically limited, the term "polymer" includes all possible spatial configurations of the molecule. These configurations include, but are not limited to isotactic, syndiotactic and random symmetries. Unless otherwise indicated, polymer properties discussed herein are in reference to pre-spinning properties.

As used herein "pattern bonding" means bonding one or more layers of fabric at numerous small, discrete locations. As one example, thermal point bonding generally involves passing one or more layers to be bonded between heated rolls such as, for example, an engraved or patterned roll and a second roll. The engraved roll is patterned in some way so that the entire fabric is not bonded over its entire surface, and the second roll can either be flat or patterned. As a result, various patterns for engraved rolls have been developed for functional as well as aesthetic reasons. Exemplary bond patterns are described in U.S. Patent No. 3,855,046 and U.S. Design Patent No. 375,844 as well as numerous other patents.

As used herein, the term "autogenous bonding" refers to bonding between discrete parts and/or surfaces independently of external additives such as adhesives, solders, mechanical fasteners and the like. As an example, many multicomponent filaments may be autogenously bonded by developing inter-filament bonds at filament contact points without significantly degrading either the web structure or the filament structure. Desirably, autogenous bonding is carried out with a non-compacting process which does not significantly compact or densify the web structure.

25

DESCRIPTION OF THE INVENTION

As discussed above, the method of the present invention provides an economical process for making an apertured, high-loft nonwoven fabric of crimped multicomponent continuous spunbond filaments. In practicing the method of the present invention, a nonwoven precursor web of multicomponent continuous spunbond filaments is treated by mechanical arrangement of the filaments with hydraulic streams to form apertures. The thus treated nonwoven web is subsequently autogenously bonded to maintain the integrity and loft of the fabric. Fabrics made by the method of the present invention are particularly useful for making personal care articles, garments, medical products, cleaning products, and other products as well.

In practicing the present invention, a loose continuous filament precursor web is treated with liquid streams to arrange the filaments in such a way as to effect apertures through the web. A loose filament web is a web in which the individual filaments lack any substantial amount of bonding to one another such that the individual filaments are free to move in an individual manner under an applied force. The loose continuous filament precursor web is desirably formed by a multicomponent continuous filament spunbond process. Spunbond webs useful in the present invention desirably have basis weights from about 0.25 ounces per square yard (osy) to about 3 osy, and more desirably have basis weights from about 0.5 osy to about 1.5 osy. Spunbond filaments are generally formed by extruding molten thermoplastic material as filaments from a plurality of fine capillaries of a spinneret with the diameter of the extruded filaments then being rapidly reduced. Generally, spunbond filaments can have an average filament diameter between about 10 and about 35 micrometers and still more desirably an average fiber diameter of between about 12 micrometers and about 25 micrometers. Examples of spunbond filaments and methods of making the same are described in U.S. Patent No. 4,340,563 to Appel et al., U.S. Patent No. 3,692,618 to Dorschner et al., U.S. Patent No. 3,802,817 to Matsuki et al., U.S. Patent Nos. 3,338,992 and 3,341,394 to Kinney, U.S. Patent No. 3,502,763 to Hartman, U.S. Patent No. 3,542,615 to Dobo et al, and U.S. Patent No. 5,382,400 to Pike et al.

The components forming the filaments can comprise one or more melt-processable polymers. The individual components can comprise the same, similar and/or different polymers. However, at least two of the individual components are distinct in that they have selected and distinct melting points. The polymeric components of the multicomponent filaments are desirably selected from thermoplastic polymers including, but are not limited to, polyolefins (e.g., polypropylene and polyethylene), polycondensates (e.g., polyamides, polyesters, polycarbonates, and polyarylates), polyols, polydienes, polyurethanes, polyethers, polyacrylates, polyacetals, polyimides, cellulose esters, polystyrenes and so forth. As particular examples, the polymeric components can comprise polyethylene, polypropylene, poly(1-butene), poly(2-butene), poly(1-pentene), poly(2-pentene), poly(1-methyl-1-pentene), poly(3-methyl-1-pentene), and poly(4-methyl-1-pentene) and so forth. In addition, blends and/or copolymers of the aforesaid polymers are likewise suitable for use in one or more components of the multicomponent filament. The individual components or segments comprising the multicomponent filament can comprise the same polymer or different polymers. By way of example only, desired combinations of polymer segments can comprise polyolefin/polyamide; polyolefin/polyester; polyolefin/polyolefin and so forth. More particularly, examples of suitable polymeric component combinations include, but are not limited to,

polypropylene/polyethylene, polypropylene/polypropylene, polyethylene/nylon, polyethylene/polyester and so forth.

A precursor web useful in the method of the present invention is a web of crimped or crimpable multicomponent filaments. Exemplary crimped filaments have a three-dimensional curl such as, for example, a helical crimp as opposed to random two-dimensional waves or undulations in the filament. In reference to FIGS. 2A and 2B, a continuous bicomponent filament comprising a first polymeric component A and a second polymeric component B suitable for producing crimped or crimpable filaments is shown. The first and second components A and B can be arranged in substantially distinct zones within the cross-section of the filament that extend substantially continuously along the length of the filament. The individual components are positioned within the filament cross-section in a crimpable configuration. As an example, the first and second components A and B can be arranged in either a side-by-side arrangement as depicted in FIG. 2A or an eccentric sheath/core arrangement as depicted in FIG. 2B. In eccentric sheath/core filaments, one component fully occludes or surrounds the other but is asymmetrically located in the filament to allow filament crimp. As additional examples, the filaments can comprise combinations of sheath/core and side-by-side arrangement of filaments as shown in reference to FIGS. 2C and 2D. However, it is noted that numerous other cross-sectional configurations and/or filament shapes are suitable for use with the present invention. The respective polymer components can be present in ratios (by volume) of from about 85/15 to about 15/85. Ratios of approximately 50/50 are often desirable; however, the particular ratios employed can vary as desired. In this regard, although the particular process described herein is primarily described with respect to bicomponent filaments, the method of the present invention and materials made therefrom are not limited to such bicomponent structures and other multicomponent configurations, for example configurations using more than two polymers and/or more than two components, are intended to be encompassed by the present invention.

As described above, nonwoven webs made from crimped filaments generally have a lower density, higher loft and improved resiliency compared to similar spunbond filament nonwoven webs comprised of filaments which are not crimped. Nonwoven web density is calculated from the basis weight of the fabric and the fabric thickness or bulk. Fabric thickness or bulk can be measured using an Ames thickness tester Model 3223, under a 3 inch circular platen and a total weight of 0.4 pounds. As examples, the high loft crimped multicomponent continuous filament webs of the invention can have a density equal to or less than about 0.09 grams per cubic centimeter (g/cm^3), more desirably between about

0.07 g/cm³ and about 0.005 g/cm³, and still more desirably between about 0.06 g/cm³ and about 0.01 g/cm³.

In one aspect of the present invention, formation of crimp in filaments of the precursor web may be achieved before web formation by activation of the latent helical crimp through the application of heat to the filaments in the draw unit. Such a process is described in U.S. Patent No. 5,382,400 to Pike et al., the entire contents of which are herein incorporated by reference. In another aspect of the present invention, formation of crimp in the precursor web may be achieved after web formation by activation of latent helical crimp through the application of heat to the web at a time after web formation. Activation of latent crimp by the application of heat is described in, for example, U.S. Patent No. 3,423,266 to Davies et al., the entire contents of which are herein incorporated by reference. In the case of either precursor web, the polymeric components of the multicomponent filaments comprise polymers that are different from one another in that they have disparate stress or elastic recovery properties, crystallization rates and/or melt viscosities. Such multicomponent filaments can form crimped filaments having a helical crimp in a single continuous direction, that is to say that one polymer will substantially continuously be located on the inside of the helix. Further, in applications where through-air bonding of the web is desirable, one of the polymer components desirably has a melting point at least about 10° C lower than that of the other component.

Turning to FIG. 1, a process line 10 for an exemplary embodiment of the method of the invention is disclosed. In reference to FIG. 1, the process line 10 is arranged to produce bicomponent continuous filaments, but it should be understood that the present invention encompasses the use of nonwoven fabrics made with multicomponent filaments having more than two components.

The process line 10 includes a pair of extruders 12a and 12b for separately extruding polymer component A and polymer component B. Polymer component A is fed into the respective extruder 12a from a first hopper 14a and polymer component B is fed into the respective extruder 12b from a second hopper 14b. Polymer components A and B are fed from the extruders 12a and 12b through respective polymer conduits 16a and 16b to a spinneret 18. Spinnerets for extruding bicomponent filaments are well known to those of ordinary skill in the art and thus are not described here in detail.

Generally described, the spinneret 18 includes a housing containing a spin pack which includes a plurality of plates stacked one on top of the other with a pattern of openings arranged to create flow paths for directing polymer components A and B separately through the spinneret. An exemplary spin pack for producing multicomponent filaments is described in U.S. Patent No. 5,989,004 to Cook, the entire contents of which

are herein incorporated by reference. The spinneret 18 has openings arranged in one or more rows. The spinneret openings form a downwardly extending curtain of filaments when the polymers are extruded through the spinneret. For the purposes of the present invention, spinneret 18 may be arranged to form side-by-side or sheath/core bicomponent filaments as illustrated in FIGS. 2A and 2B. Other filament cross sections believed suitable are combination side-by-side sheath/core bicomponent filaments as illustrated in FIGS. 2C and 2D.

The process line 10 also includes a quench blower 20 positioned adjacent the curtain of filaments extending from the spinneret 18. Air from the quench air blower 20 quenches the filaments extending from the spinneret 18. The quench air can be directed from one side of the filament curtain as shown in FIG. 1, or both sides of the filament curtain. As used herein, the term "quench" simply means reducing the temperature of the filaments using a medium that is cooler than the filaments such as using, for example, ambient air.

A filament draw unit or aspirator 22 is positioned below the spinneret 18 and the quench blower 20 and receives the quenched filaments. Filament draw units or aspirators for use in melt spinning polymers are well known. Suitable filament draw units for use in the method of the present invention include, for example, a linear filament aspirator of the type shown in U.S. Pat. No. 3,802,817 and eductive guns of the type shown in U.S. Pat. No. 3,692,618 and U.S. Pat. No. 3,423,266, the disclosures of which are incorporated herein by reference.

Generally described, the filament draw unit 22 includes an elongate vertical passage through which the filaments are drawn by aspirating air entering from the sides of the passage and flowing downwardly through the passage. Aspirating air is supplied by blower 24. The aspirating air may be heated or unheated. The aspirating air pulls the filaments through the passage of the filament draw unit 22 and attenuates the filaments, that is, reduces the diameter of the filaments. When it is desired to activate latent helical crimp in the filaments prior to filament laydown, the blower 24 supplies heated aspirating air to the filament draw unit 22. In this respect, the heated aspirating air both attenuates the filaments and activates the latent helical crimp. When it is desired to activate the latent helical crimp in the filaments at some point following filament laydown the blower 24 supplies unheated aspirating air to filament draw unit 22. In this instance, heat to activate the latent crimp would be supplied to the web at some point after filament laydown, which point could be either before or after the hydraulic arrangement step.

An endless foraminous forming surface 26 is positioned below the filament draw unit 22 to receive the attenuated filaments from the outlet opening of the filament draw

unit 22. The foraminous forming surface 26 travels around guide rollers 28. A vacuum 30 positioned below the foraminous forming surface 26 pulls the attenuated filaments onto foraminous forming surface 26. The filaments received onto foraminous forming surface 26 comprise a nonwoven web of loose continuous filaments.

5 The process line 10 further includes a hydraulic arrangement station 36 which is capable of spraying downwardly streams of liquid across the entire cross machine direction distance of the nonwoven web. The nonwoven web of loose continuous filaments is transported by foraminous forming surface 26 through the hydraulic arrangement station 36. Positioned below the hydraulic arrangement station 36 and
10 immediately below foraminous forming surface 26 is a liquid receiver 40 which collects and transports the liquid away from the process. Liquid receiver 40 may simply act as a drainage basin or may desirably be a vacuum source to more efficiently aid in removal of excess liquid from process and from the nonwoven web.

 Foraminous forming surface 26 has elevated portions upon its surface. These
15 elevated portions upon the surface may be in the form of knuckles on a conventional forming wire, or in the form of raised protuberances or knobs attached to the forming surface. As the nonwoven web of loose continuous filaments is carried under the hydraulic arrangement station 36 by foraminous forming surface 26, the streams of liquid penetrate the nonwoven web and the liquid passes through foraminous forming surface
20 26. The action of the liquid streams on the loose continuous filaments of the nonwoven web causes the loose filaments to be moved away from the elevated portions of the surface of foraminous forming surface 26. In this manner, by being moved away from the elevated portions, the loose continuous filaments are arranged to form apertures in those areas corresponding to the elevated portions of foraminous forming surface 26. Different
25 patterns of apertures, different sizes of individual apertures, and/or different numbers of apertures per unit area of the nonwoven fabric may be produced in the nonwoven web by selection the configuration, size, and/or number of raised protuberances on foraminous forming surface 26. By way of example only, the number of elevated portions per square inch may number as many as 400 or higher. Also by way of example only, where raised
30 protuberances are used, the shape of protuberances may be selected to effect apertures of desired shapes, such as a hemispherical protuberance for a substantially circular aperture or an elongate protuberance for an elongated aperture.

 The liquid streams from hydraulic arrangement station 36, unlike those used in hydroentangling processes known in the art, do not have as their object the purpose of
35 imparting substantial filament entanglement. Therefore, the liquid streams from hydraulic arrangement station 36 can impart apertures to the loose continuous filament web at

pressures much lower than are used in hydroentangling. Indeed, it is undesirable to deliver the liquid at too high a pressure as this would deleteriously impact the loftiness of the web. Therefore, it is desirable for the liquid streams to be delivered from hydraulic arrangement station 36 at less than 100 pounds per square inch (psi), and more desirably at less than 70 pounds per square inch. In addition, the means by which the liquid streams are supplied may be much simpler and cheaper than the expensive nozzles required to supply the high-pressure, needle fine jets used in hydroentangling. As an example, inexpensive and relatively simple conventional solid cone nozzles may be used. As an alternative example, the filament arranging force supplied by hydraulic arrangement station 36 may be provided as a liquid curtain which flows over a spillway to free-fall onto the web of loose continuous filaments with sufficient force to cause movement of the loose filaments. The amount of force desired to be delivered by the liquid curtain may be adjusted by changing the flow volume of liquid and the height from which it falls onto the web of loose continuous filaments.

The process line 10 further includes a bonding device such as the through-air bonder 42. Through-air bonders are well known to those skilled in the art and are not disclosed here in detail. In reference to FIG. 1, conveyor 38 transfers the web of arranged continuous filaments from foraminous forming surface 26 to the through-air bonder 42. Through-air bonder 42 directs a stream of hot air through the web of continuous bicomponent filaments thereby forming inter-filament bonds. Desirably the through-air bonder 42 utilizes air having a temperature at about or above the polymer melting temperature of the lower melting polymer component and below the melting temperature of higher melting polymer component. The heated air is directed from the hood 46, through the web, and into the perforated roller 44. The hot air melts the lower melting polymer component and thereby forms durable nonwoven web 48 having autogenous bonds between the bicomponent filaments at filament contact points. However, since the air temperature is desirably below the melting temperature of the higher melting polymer component, the high melting polymer component does not significantly soften and the web substantially retains its dimensional structure. The desired dwell time and air temperature will vary with the particular polymers selected, the desired degree of bonding and other factors known to those skilled in the art. However, through-air bonding will often be more desirable in those particular embodiments where the polymers forming the respective components have melting points at least about 10° C apart, and even more desirably at least about 20° C apart.

Lastly, the process line 10 further includes a winding roll 50 for taking up the finished fabric. FIG. 3 is a schematic drawing of an exemplary nonwoven fabric of the

present invention wherein fabric 100 comprises both land areas 110 comprising bicomponent fibers and apertures 120. While not shown here, various additional potential processing and/or finishing steps known in the art such as web slitting, stretching, treating, or lamination of the apertured nonwoven fabric into a composite with other

5 materials, such as films or other nonwoven layers, may be performed without departing from the spirit and scope of the invention. Examples of web treatments include electret treatment to induce a permanent electrostatic charge in the web, or in the alternative antistatic treatments. Another example of web treatment includes treatment to impart wettability or hydrophilicity to a web comprising hydrophobic thermoplastic material.

10 Wettability treatment additives may be incorporated into the polymer melt as an internal treatment, or may be added topically at some point following filament or web formation. Advantageously, a topical wettability additive may be incorporated into the fluid used in the hydraulic arrangement station so that wettability treatment is carried out contemporaneously with the filament arrangement step. As a further example, depending

15 on fabric basis weight and wettability of the fabric components, it may be desirable to implement a drying processing step to fully dry the web prior to autogenously bonding the web. An example of a drying step well known in the art is the use of drying cans which are steam heated to a temperature sufficient to remove excess moisture from the nonwoven fabric without damaging the structure of the nonwoven fabric.

20 In addition, it will be appreciated by those skilled in the art that various specific process steps and/or parameters could be varied in numerous respects without departing from the spirit and scope of the invention. For example, the hydraulic arrangement step whereby the apertures are formed may be accomplished on other apparatus known in the art such as on a perforated rotatable drum. In this aspect the nonwoven web travels

25 along the outside surface of the perforated rotatable drum, outwardly supported by a foraminous support surface. The foraminous support surface in this instance is for support only and need not have elevated portions upon its surface. The liquid streams are sprayed outwardly from inside the drum and are able to spray through the drum at the drum perforations. As the liquid streams spray through the perforations the liquid streams

30 penetrate the nonwoven web at the sites of the drum perforations, moving the loose continuous filaments aside to arrange the loose continuous filaments to form apertures in those areas corresponding to the drum perforations.

As another example, the molten filaments may be melt-attenuated utilizing other apparatus known in the art. As an additional example, while the multicomponent filaments

35 of the present invention can be autogenously bonded by the use of through-air bonding,

the filaments of the loose filament web may also be autogenously bonded by other means such as the use of infrared radiation or microwaves.

The apertured nonwoven fabrics of the present invention have a great variety of uses and include, but are not limited to, articles or components of articles such as
5 absorbent personal care products, garments, medical products, cleaning products, and so forth. As specific examples nonwoven personal care products include personal hygienic care items such as facial and body wipes, infant care items such as diapers and baby
wipes, child care items such as training pants, feminine care items such as sanitary
napkins, and adult care items such as incontinence products. Examples of nonwoven
10 garments include protective workwear and medical apparel such as surgical gowns. Other nonwoven medical products include nonwoven wound dressings, surgical sponges and surgical dressings. Cleaning product uses for nonwovens include towels and wipes.

More specific examples of uses for the apertured nonwoven fabrics of the
invention as components of personal care articles include, but are not limited to, fluid
15 management layers such as fluid distribution or retention layers, and body side skin contact layers or liners for intake and transport of high and/or low viscosity bodily fluids.

Numerous other patents have been referred to in the specification and to the extent there is any conflict or discrepancy between the teachings incorporated by
reference and that of the present specification, the present specification shall control.

20 Additionally, while the invention has been described in detail with respect to specific embodiments thereof, it will be apparent to those skilled in the art that various alterations, modifications and/or other changes may be made without departing from the spirit and scope of the present invention. It is therefore intended that all such modifications, alterations and other changes be encompassed by the claims.

We Claim:

1. A process of forming a nonwoven fabric, comprising:
 - (a) forming a lofty precursor web of substantially continuous multicomponent filaments, wherein the web has a density of about 0.09 grams per cubic centimeter or less;
 - (b) exposing the precursor web to a hydraulic arrangement treatment to form apertures, wherein said hydraulic arrangement treatment is performed without imparting substantial filament entanglement; and thereafter
 - (c) autogenously bonding the web, wherein the bonded web has a density of about 0.09 grams per cubic centimeter or less.
2. The process according to Claim 1 wherein the lofty precursor web comprises a web of substantially loose multicomponent filaments.
3. The process according to Claim 2 wherein the lofty precursor web comprises crimped multicomponent filaments.
4. The process according to Claim 1 wherein said hydraulic arrangement treatment comprises application of liquid streams at about 100 pounds per square inch or less.
5. The process according to Claim 4 wherein said hydraulic arrangement treatment comprises application of liquid streams at about 70 pounds per square inch or less.
6. The process according to Claim 1 wherein the step of autogenously bonding the web comprises forming inter-filament bonds using heated air.
7. The process according to Claim 1 wherein the components of said multicomponent filaments are selected from the group comprising polyolefins, polyesters, polyamides, and polyurethanes.

8. The process according to Claim 1 wherein the components of said multicomponent filaments comprise polypropylene and polyethylene.
9. The process according to Claim 1 wherein said continuous multicomponent filaments are formed by a spunbonding process.
10. The process according to Claim 9 wherein said continuous multicomponent filaments have an average filament diameter greater than about 10 micrometers.
11. A process of forming a nonwoven fabric, comprising:
 - (a) forming a precursor web of substantially continuous multicomponent filaments;
 - (b) exposing the precursor web to a hydraulic arrangement treatment to form apertures, wherein said hydraulic arrangement treatment is performed without imparting substantial filament entanglement; and thereafter
 - (c) autogenously bonding the web.
12. The process according to Claim 11 wherein the precursor web comprises a web of substantially loose multicomponent filaments.
13. The process according to Claim 11 wherein the precursor web comprises multicomponent filaments having latent crimp.
14. The process according to Claim 13 wherein said latent crimp is activated during the step of autogenously bonding the web.
15. The process according to Claim 11 wherein said hydraulic arrangement treatment comprises application of liquid streams at about 100 pounds per square inch or less.
16. The process according to Claim 15 wherein said hydraulic arrangement treatment comprises application of liquid streams at about 70 pounds per square inch or less.

17. The process according to Claim 11 wherein the step of autogenously bonding the web comprises forming inter-filament bonds using heated air.
18. The process according to Claim 11 wherein the components of said multicomponent filaments are selected from the group comprising polyolefins, polyesters, polyamides, and polyurethanes.
19. The process according to Claim 18 wherein the components of said multicomponent filaments comprise polypropylene and polyethylene.
20. The process according to Claim 11 wherein said continuous multicomponent filaments are formed by a spunbonding process.

1/4

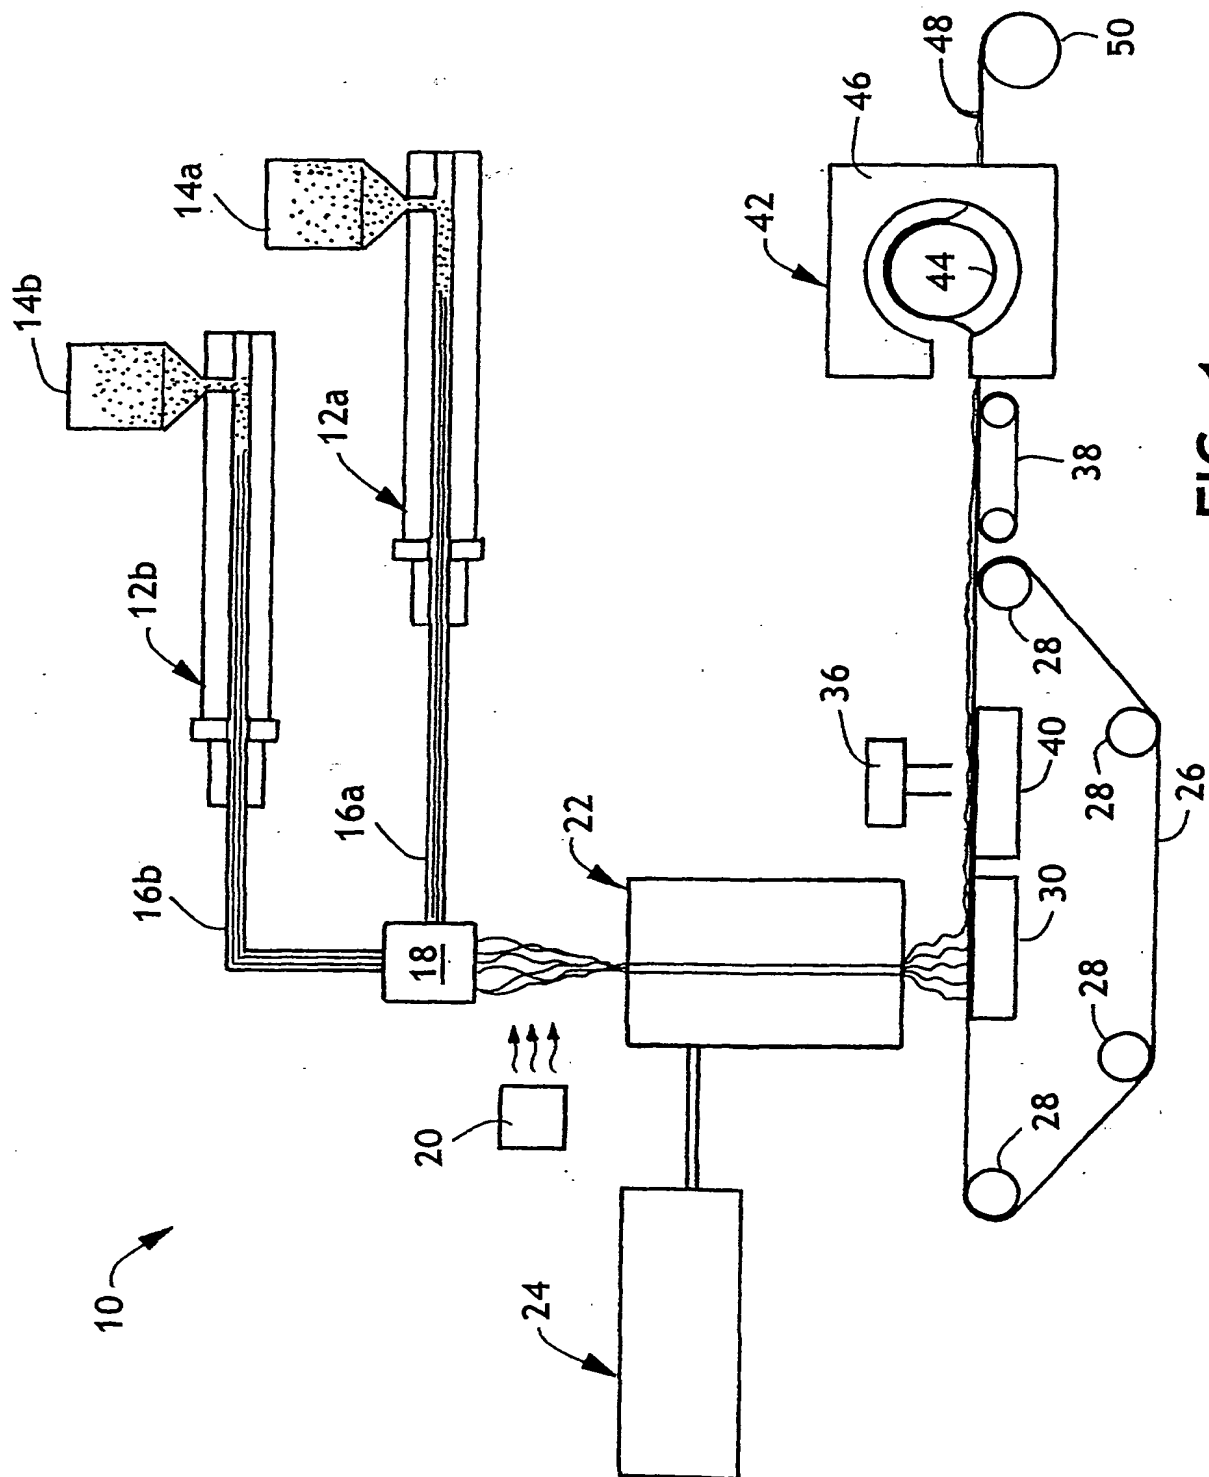


FIG. 1

2/4

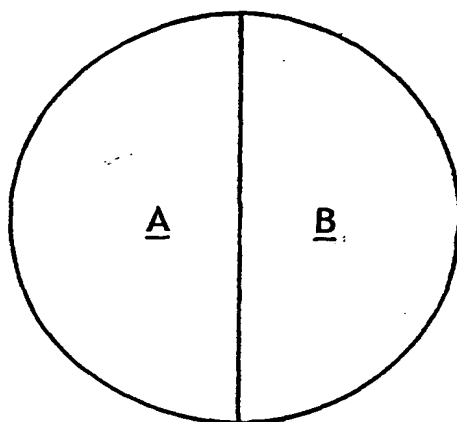


FIG. 2A

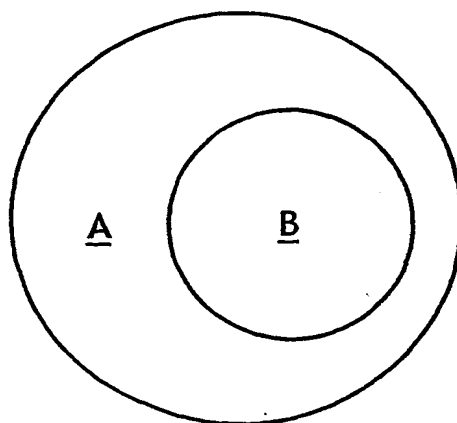


FIG. 2B

3/4

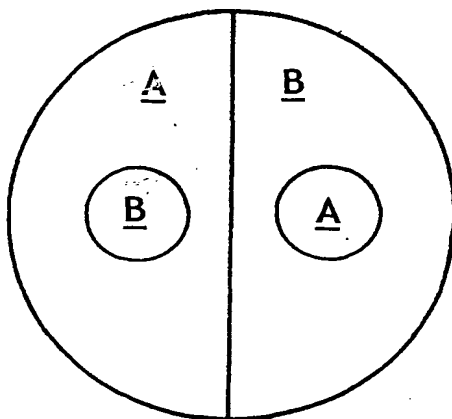


FIG. 2C

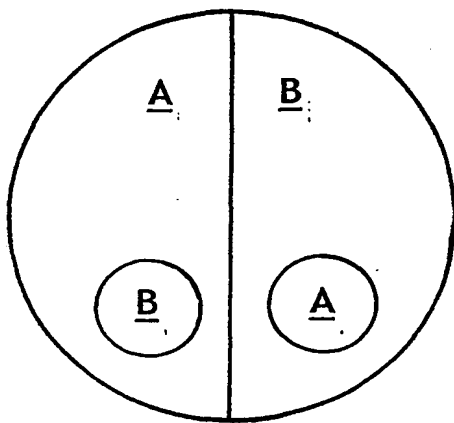


FIG. 2D

4/4

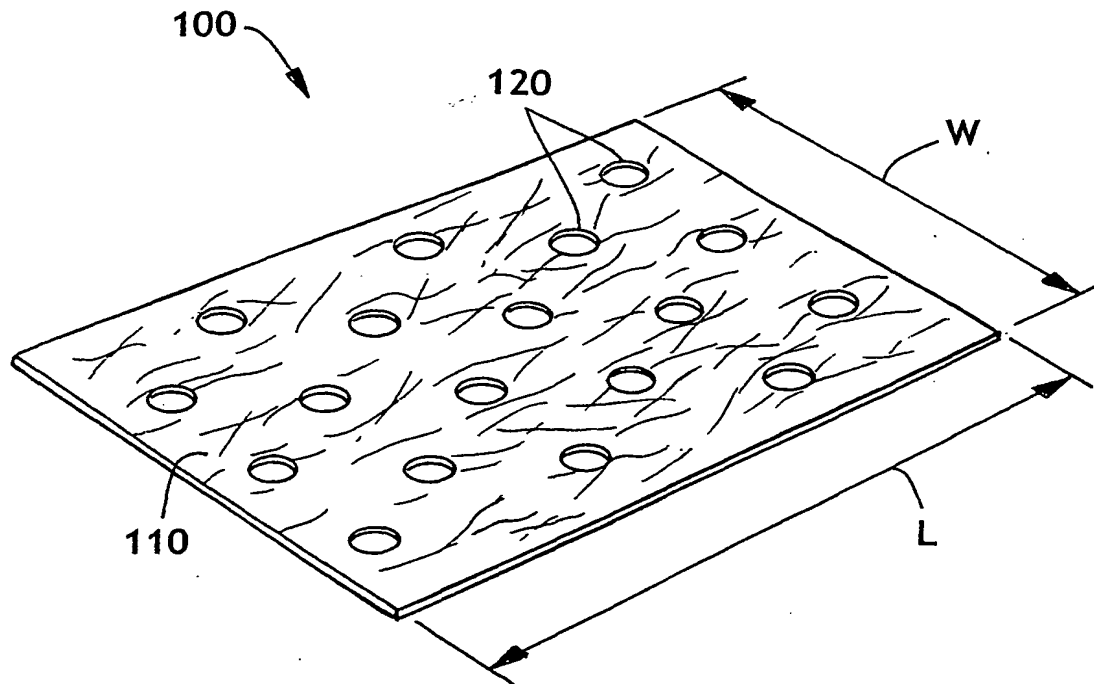


FIG. 3

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 July 2002 (18.07.2002)

PCT

(10) International Publication Number
WO 02/055779 A3

(51) International Patent Classification⁷: D04H 1/46, 3/10, 3/16, B26F 1/26, D04H 3/14

(21) International Application Number: PCT/US01/48858

(22) International Filing Date:
12 December 2001 (12.12.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/257,246 20 December 2000 (20.12.2000) US
10/004,615 1 November 2001 (01.11.2001) US

(71) Applicant: **KIMBERLY-CLARK WORLDWIDE, INC.** [US/US]; 401 N. Lake Street, Neenah, WI 54956 (US).

(72) Inventors: **STEINKE, Tara, Tryphena**; 1600 West Broadway #8A, Anaheim, CA 92802 (US). **SHULTZ, Jay, Sheldon**; 550 Woodline Court, Roswell, GA 30076 (US).

(74) Agents: **AMBROSE, Robert, A.** et al.; **KIMBERLY-CLARK WORLDWIDE, INC.**, 401 N. Lake Street, Neenah, WI 54956 (US).


(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

[Continued on next page]

(54) Title: HYDRAULICALLY APERTURED NONWOVEN WEBS AND METHOD OF MAKING SAME

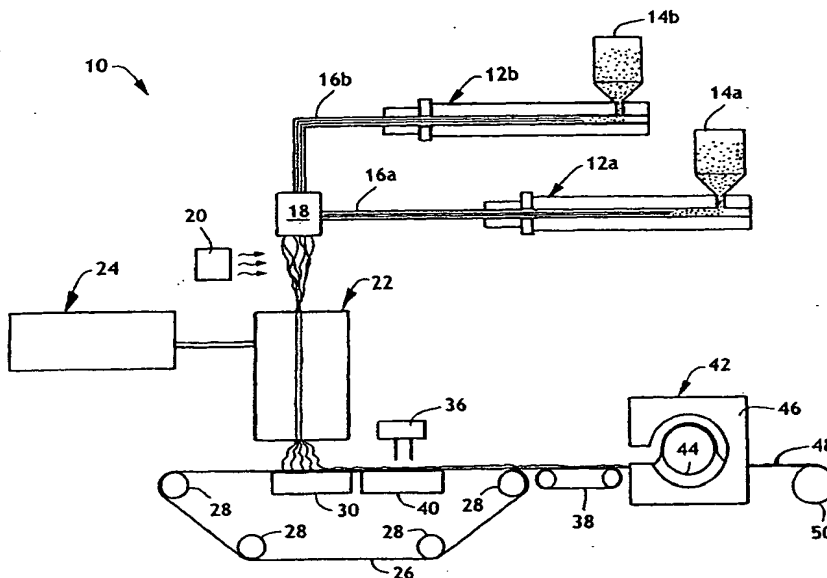

(57) Abstract: A process of forming a nonwoven fabric is disclosed which comprises the steps of forming a precursor web of multicomponent substantially continuous filaments, exposing the precursor web to a hydraulic arrangement treatment to form apertures without causing substantial filament entanglement, and thereafter forming inter-filament bonds and an integrated web. The resulting apertured nonwoven fabrics have good hand and tactile aesthetics and have a great variety of uses including use in absorbent personal care products, garments, medical applications, and cleaning applications.

WO 02/055779 A3



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(88) Date of publication of the international search report:
17 April 2003

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/48858

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 D04H1/46 D04H3/10 D04H3/16 B26F1/26 D04H3/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B26F D04H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 00 22218 A (KLEIN BERNHARD ;SCHAUT GERHARD (DE); FREUDENBERG CARL (DE); GROITZ) 20 April 2000 (2000-04-20) examples	1-20
A	US 4 735 842 A (BUYOFSKY CONRAD C ET AL) 5 April 1988 (1988-04-05) cited in the application the whole document	1,11
A	WO 95 06769 A (UNIV MANCHESTER ;FOSTER PETER (GB); PORAT ITZCHAK (GB)) 9 March 1995 (1995-03-09) the whole document	1,11
A	US 2 862 251 A (FRANK KALWAITES) 2 December 1958 (1958-12-02) the whole document	1,11
-/--		

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

6 February 2003

Date of mailing of the international search report

20/02/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Barathe, R

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 01/48858

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3 747 161 A (KALWAITES F) 24 July 1973 (1973-07-24) cited in the application the whole document ---	1,11
A	US 3 906 130 A (EMORI SHUICHI ET AL) 16 September 1975 (1975-09-16) the whole document ---	1-20
A	EP 1 039 006 A (FLEISSNER GEROLD) 27 September 2000 (2000-09-27) the whole document ---	1-20
A	US 3 494 821 A (EVANS FRANKLIN JAMES) 10 February 1970 (1970-02-10) the whole document ---	1,11
A	US 4 840 829 A (SUZUKI MIGAKU ET AL) 20 June 1989 (1989-06-20) the whole document ---	1,11
A	EP 0 586 924 A (KIMBERLY CLARK CO) 16 March 1994 (1994-03-16) the whole document -----	1,11

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/48858

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0022218	A	20-04-2000	DE 19846857 C1	02-03-2000
			AU 748374 B2	06-06-2002
			AU 5853999 A	01-05-2000
			BG 105502 A	31-12-2001
			BR 9914536 A	03-07-2001
			CA 2346889 A1	20-04-2000
			CN 1326521 T	12-12-2001
			CZ 20011294 A3	15-08-2001
			WO 0022218 A1	20-04-2000
			EP 1121481 A1	08-08-2001
			HU 0104008 A2	28-03-2002
			JP 2002527636 T	27-08-2002
			NO 20011880 A	06-06-2001
			PL 347245 A1	25-03-2002
			RU 2184182 C1	27-06-2002
			SK 4922001 A3	08-10-2001
			TR 200101807 T2	21-01-2002
US 4735842	A	05-04-1988	US 4693922 A	15-09-1987
			AU 585650 B2	22-06-1989
			AU 6318186 A	02-04-1987
			BR 8604638 A	09-06-1987
			CA 1273190 A1	28-08-1990
			DE 3689328 D1	05-01-1994
			DE 3689328 T2	23-06-1994
			EP 0223965 A2	03-06-1987
			IE 62207 B1	28-12-1994
			JP 2645481 B2	25-08-1997
			JP 62110958 A	22-05-1987
			NZ 217470 A	30-03-1988
			PH 22463 A	12-09-1988
			PT 83427 A , B	06-05-1987
			ZA 8607326 A	27-04-1988
WO 9506769	A	09-03-1995	AU 7502994 A	22-03-1995
			DE 69412106 D1	03-09-1998
			DE 69412106 T2	25-03-1999
			EP 0719355 A1	03-07-1996
			WO 9506769 A1	09-03-1995
US 2862251	A	02-12-1958	BE 572275 A	
			DE 1224697 B	17-01-1974
			FR 1183103 A	03-07-1959
			GB 836397 A	01-06-1960
			NL 110975 C	
			NL 219529 A	
			PH 11570 A	31-03-1978
US 3747161	A	24-07-1973	US 3033721 A	08-05-1962
			DE 2239058 A1	21-02-1974
			NL 7211131 A , B,	19-02-1974
			AU 463736 B2	07-08-1975
			AU 4533272 A	14-02-1974
			CA 955739 A1	08-10-1974
US 3906130	A	16-09-1975	GB 1371863 A	30-10-1974
			JP 877579 C	22-08-1977
			JP 49030665 A	19-03-1974

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/48858

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3906130	A	JP 52006381 B DE 2338359 A1 IT 994113 B	22-02-1977 14-02-1974 20-10-1975
EP 1039006	A 27-09-2000	DE 19912905 A1 EP 1039006 A1 JP 2000303347 A US 2002046449 A1 US 6338187 B1	28-09-2000 27-09-2000 31-10-2000 25-04-2002 15-01-2002
US 3494821	A 10-02-1970	NONE	
US 4840829	A 20-06-1989	JP 7037702 B JP 63243360 A DE 3786907 D1 EP 0273454 A2 ES 2043641 T3 GB 2200927 A	26-04-1995 11-10-1988 09-09-1993 06-07-1988 01-01-1994 17-08-1988
EP 0586924	A 16-03-1994	US 5382400 A AU 664472 B2 AU 4448193 A BR 9303220 A CA 2084151 A1 DE 69314895 D1 DE 69314895 T2 EP 0586924 A1 ES 2111099 T3 JP 3283347 B2 JP 6065849 A KR 236627 B1 MX 9302415 A1 US 5418045 A ZA 9304766 A	17-01-1995 16-11-1995 24-02-1994 15-03-1994 22-02-1994 04-12-1997 05-03-1998 16-03-1994 01-03-1998 20-05-2002 08-03-1994 02-03-2000 28-02-1994 23-05-1995 20-01-1994

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/48858

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 D04H1/46 D04H3/10 D04H3/16 B26F1/26 D04H3/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B26F D04H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 00 22218 A (KLEIN BERNHARD ;SCHAUT GERHARD (DE); FREUDENBERG CARL (DE); GROITZ) 20 April 2000 (2000-04-20) examples	1-20
A	US 4 735 842 A (BUYOFSKY CONRAD C ET AL) 5 April 1988 (1988-04-05) cited in the application the whole document	1,11
A	WO 95 06769 A (UNIV MANCHESTER ;FOSTER PETER (GB); PORAT ITZCHAK (GB)) 9 March 1995 (1995-03-09) the whole document	1,11
A	US 2 862 251 A (FRANK KALWAITES) 2 December 1958 (1958-12-02) the whole document	1,11
-/--		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *G* document member of the same patent family

Date of the actual completion of the international search

6 February 2003

Date of mailing of the international search report

20/02/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Barathe, R

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/48858

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3 747 161 A (KALWAITES F) 24 July 1973 (1973-07-24) cited in the application the whole document ----	1, 11
A	US 3 906 130 A (EMORI SHUICHI ET AL) 16 September 1975 (1975-09-16) the whole document ----	1-20
A	EP 1 039 006 A (FLEISSNER GEROLD) 27 September 2000 (2000-09-27) the whole document ----	1-20
A	US 3 494 821 A (EVANS FRANKLIN JAMES) 10 February 1970 (1970-02-10) the whole document ----	1, 11
A	US 4 840 829 A (SUZUKI MIGAKU ET AL) 20 June 1989 (1989-06-20) the whole document ----	1, 11
A	EP 0 586 924 A (KIMBERLY CLARK CO) 16 March 1994 (1994-03-16) the whole document -----	1, 11

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/US 01/48858

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0022218	A	20-04-2000	DE 19846857 C1	02-03-2000
			AU 748374 B2	06-06-2002
			AU 5853999 A	01-05-2000
			BG 105502 A	31-12-2001
			BR 9914536 A	03-07-2001
			CA 2346889 A1	20-04-2000
			CN 1326521 T	12-12-2001
			CZ 20011294 A3	15-08-2001
			WO 0022218 A1	20-04-2000
			EP 1121481 A1	08-08-2001
			HU 0104008 A2	28-03-2002
			JP 2002527636 T	27-08-2002
			NO 20011880 A	06-06-2001
			PL 347245 A1	25-03-2002
			RU 2184182 C1	27-06-2002
			SK 4922001 A3	08-10-2001
			TR 200101807 T2	21-01-2002
US 4735842	A	05-04-1988	US 4693922 A	15-09-1987
			AU 585650 B2	22-06-1989
			AU 6318186 A	02-04-1987
			BR 8604638 A	09-06-1987
			CA 1273190 A1	28-08-1990
			DE 3689328 D1	05-01-1994
			DE 3689328 T2	23-06-1994
			EP 0223965 A2	03-06-1987
			IE 62207 B1	28-12-1994
			JP 2645481 B2	25-08-1997
			JP 62110958 A	22-05-1987
			NZ 217470 A	30-03-1988
			PH 22463 A	12-09-1988
			PT 83427 A , B	06-05-1987
			ZA 8607326 A	27-04-1988
WO 9506769	A	09-03-1995	AU 7502994 A	22-03-1995
			DE 69412106 D1	03-09-1998
			DE 69412106 T2	25-03-1999
			EP 0719355 A1	03-07-1996
			WO 9506769 A1	09-03-1995
US 2862251	A	02-12-1958	BE 572275 A	
			DE 1224697 B	17-01-1974
			FR 1183103 A	03-07-1959
			GB 836397 A	01-06-1960
			NL 110975 C	
			NL 219529 A	
			PH 11570 A	31-03-1978
			US 3033721 A	08-05-1962
US 3747161	A	24-07-1973	DE 2239058 A1	21-02-1974
			NL 7211131 A , B ,	19-02-1974
			AU 463736 B2	07-08-1975
			AU 4533272 A	14-02-1974
			CA 955739 A1	08-10-1974
			GB 1371863 A	30-10-1974
US 3906130	A	16-09-1975	JP 877579 C	22-08-1977
			JP 49030665 A	19-03-1974

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/48858

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 3906130	A		JP 52006381 B DE 2338359 A1 IT 994113 B	22-02-1977 14-02-1974 20-10-1975
EP 1039006	A	27-09-2000	DE 19912905 A1 EP 1039006 A1 JP 2000303347 A US 2002046449 A1 US 6338187 B1	28-09-2000 27-09-2000 31-10-2000 25-04-2002 15-01-2002
US 3494821	A	10-02-1970	NONE	
US 4840829	A	20-06-1989	JP 7037702 B JP 63243360 A DE 3786907 D1 EP 0273454 A2 ES 2043641 T3 GB 2200927 A	26-04-1995 11-10-1988 09-09-1993 06-07-1988 01-01-1994 17-08-1988
EP 0586924	A	16-03-1994	US 5382400 A AU 664472 B2 AU 4448193 A BR 9303220 A CA 2084151 A1 DE 69314895 D1 DE 69314895 T2 EP 0586924 A1 ES 2111099 T3 JP 3283347 B2 JP 6065849 A KR 236627 B1 MX 9302415 A1 US 5418045 A ZA 9304766 A	17-01-1995 16-11-1995 24-02-1994 15-03-1994 22-02-1994 04-12-1997 05-03-1998 16-03-1994 01-03-1998 20-05-2002 08-03-1994 02-03-2000 28-02-1994 23-05-1995 20-01-1994